

GO TH Logger

Versatile temperature and humidity logger

Reusable and programmable digital data logger

Small and compact, these loggers record temperature and humidity levels during distribution and storage. The LED screen allows users to view the current time and most recent temperature and humidity readings. They are optimal for use in closed-loop situations and import/export container shipments.

Humidity and temperature data collected by the loggers can be downloaded and graphed. All data collected by the loggers can be saved electronically and is easily printed and shared.



Multi-use



Programmable



Temperature & humidity



LED screen to view data



Easy to use



Economical




GO TH Software



Technical Specifications

- Operating Humidity Range:** 0%RH to 100%RH; ± 3%RH Accuracy
- Humidity Resolution:** 0.01%RH
- Temperature Range:** -40°F (-40°C) to 176°F (80°C)
- Temperature Accuracy:** ±0.9°F (±0.5°C), 14°F (-10°C) to 176°F (80°C)
±1.8°F (±1°C), -40°F (-40°C) to 14°F (-10°C)
- Temperature Resolution:** 0.01°F (0.01°C)
- Memory:** 32,000 data points (16,000 RH%; 16,000 Temperature)
- Recording Interval:** 1 minute to 24 hours (programmable by user)
- Start Delay:** 1 minutes to 24 hours (programmable by user)
- Shelf Life:** Up to 15 months
- Size:** 3.4" x 1.1" x 0.5"(8.6cm * 2.8 cm * 1.2 cm)
- Weight:** 1.25 oz.(35g)

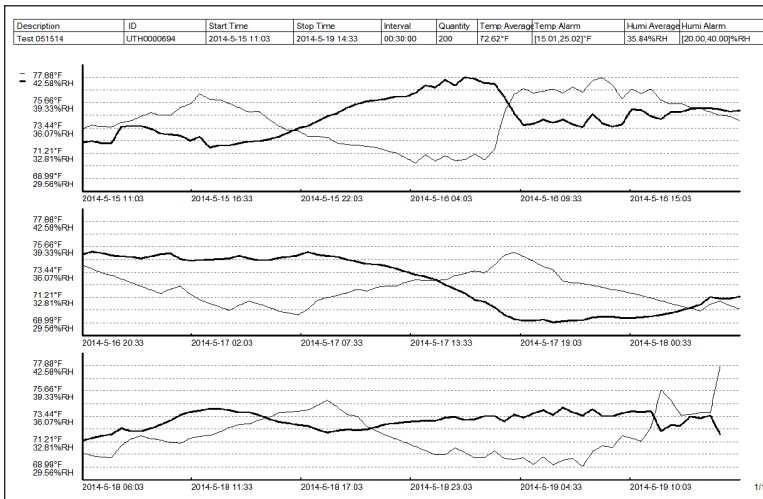

Printable Graph

Contact Information

+61 (02) 9795-2800
 AUSalesClimate@Emerson.com

Precision Monitoring

Phone: +64 9 379 0131
 sales@precisionmonitoring.co.nz
 www.precisionmonitoring.co.nz