

# GO PDF Mini Logger

Temperature Monitoring Logger in Compact Size

## Temperature Monitoring

The GO PDF Mini loggers monitor time and temperature of perishable products during distribution and storage. These easy-to-use loggers eliminate the need for reading devices and proprietary software and are optimal for applications requiring fully independent operation – simply activate and place with your shipment.

Due to their small size, the GO PDF Mini Loggers are versatile and feature a USB connection which can be plugged directly into the USB port of a computer. Once connected, the logger automatically generates a PDF file containing complete time, temperature history including graphs and summary data, as well as a complete table of all temperature readings during shipment. For added convenience, GO PDF Mini also automatically generates a CSV file.

## GO PDF Mini General Use

GO PDF Mini Loggers provide basic temperature monitoring data. Loggers feature a typical accuracy range of  $\pm 0.5^{\circ}\text{C}$  between  $-20^{\circ}\text{C}$  to  $40^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $104^{\circ}\text{F}$ ) over the operating range of  $-30^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  ( $-22^{\circ}\text{F}$  to  $158^{\circ}\text{F}$ ). GO PDF Mini loggers can record data for either 15, 60 or 90 days and function as a data logger only with no alerting capabilities.



Small, flat, waterproof recorder



Digitally records time and temperature data



Unique design plugs directly into USB port; generates PDF data file



Full independent operation - eliminates readers and software




Great for monitoring exports/imports and worldwide shipments

# Technical Specifications

## Features

Alarm Indicators:	No (historical data logger only)
Certifications:	FCC, CE, RoHS Lithium battery exemption on file
CSV file:	Yes
Export to Other Applications:	Generates PDF
In-Use Life:	15, 60, 90 days (3, 12 and 20 min recording intervals, respectively)
Marking Capabilities:	No
Operating Environment:	-30°C to 70°C (-22°F to 158°F)
Operating System:	Professional Versions of Vista, Windows 7, Windows 8, Windows 10, Adobe Reader SW (version 9 or later)
Shelf Life:	15 months
Size:	.87"x 2.95" (22mm x 75mm length (out of pouch)
Stop Button:	No
Temperature Accuracy:	+/- 0.5°C (typical) between -20°C to 40°C (-22°F to 140°F) +/- 1.0°C (other ranges); Resolution 0.1 °C
Time Zone:	Reconciled to UTC
Waterproof Rating:	IP 67, NEMA 6 rating
Weight:	12.00 g (0.42 oz)

## GO PDF Mini Logger

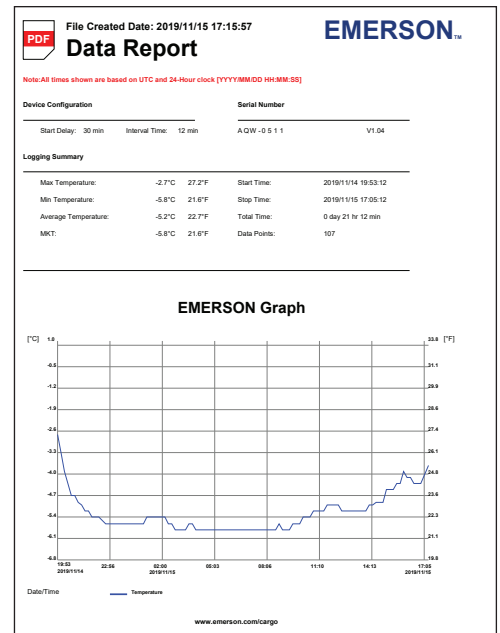

PDF Example

## Contact Information

Emerson Cargo Solutions  
+61 (02) 9795 2800  
CargoSolutions@Emerson.com

Precision Monitoring  
Phone: +64 9 379 0131  
sales@precisionmonitoring.co.nz  
www.precisionmonitoring.co.nz